

Timber Cladding

Fresh Sawn Exterior Cladding


Fresh sawn timber is, as it says, fresh sawn straight from the round log. As cladding, it is a very cost effective way of achieving a beautiful, durable timber finish to any building project. All fresh sawn cladding is a custom order item, cut to your specification from Oak, WRC, Larch or Douglas Fir and comes with either PEFC 100% or FSC 100% Chain of Custody Certification.

Fresh sawn timber is initially high in moisture and will dry out quite quickly after being cut, after which it will season/weather/silver down. The surface is a soft textured, fine sawn finish. This is cleaner and tidier than rough sawn but is not the smooth planed finish of dry machined timber.



Feather Edge

Overlapping cladding that allows for shrinkage



		PEFC 100% France	PEFC 100% France	FSC (GIB) 100% British	FSC (GIB) 100% British	FSC (GIB) 100% British	FSC (GIB) 100% British	FSC (GIB) 100% British	FSC (GIB) 100% British
Tapered Th x W mm	Lm per m²	Oak £/m²	Oak £/l m	WRC £/m²	WRC £/l m	Larch £/m²	Larch £/l m	Doug Fir £/m²	Doug Fir £/l m
25/5 x 150	8	£32.00	£4.00	P.O.A	P.O.A	P.O.A	P.O.A	£18.00	£2.25
25/5 x 175	6.7	£31.00	£4.65	P.O.A	P.O.A	P.O.A	P.O.A	£17.15	£2.60
25/5 x 200	5.8	£30.40	£5.30	P.O.A	P.O.A	P.O.A	P.O.A	£16.80	£2.95

NB. Fine sawn finish. Standard section sizes cut to order. Prices are based on using 33mm plank cut in two to produce 25 x 5mm board and a 25mm overlap in random lengths up to 3.4m and orders over 25m². For large volumes please call for a quote. For length 3.5-4.5m or fixed length add 10%

Waney Edge

Overlapping cladding that allows for shrinkage with one square edge, one waney with natural edge



	PEFC 100% France	FSC (GiB) 100% British	FSC (GiB) 100% British
Thickness mm	Oak £/m²	Larch £/m²	D.Fir £/m²
21	£35.00	P.O.A	£20.00
25	£42.00	P.O.A	£25.00

NB. Fine sawn finish & inc bark & sap wood. Widths vary due to variable diameters of logs. In softwoods, expect widths of 150- 250mm. In hardwoods, expect widths of 200 -350mm. Lengths are usually random, around 2.4m – 4.0m depending on available logs. Prices are for M2 cover taking overlap & dimensional variations into consideration. We quote & supply to ensure enough to cover your area. For volume orders please call for a quote. All prices are exc VAT & ex yard.


P.O.A.: Please don't be put off by our P.O.A charges on Larch & Western Red cedar – it's due to frequent (weekly!) fluctuations in source prices at the moment. We hope this will settle down in due course. Thank you for your patience.



Timber Cladding


Air Dried Timber Cladding

For a clean, machined look and increased stability we recommend machined air dried timbers in Chestnut, Oak or Siberian Larch. Any species can be profiled to our standard templates or in square edge or rhomboid sections for rainscreen.

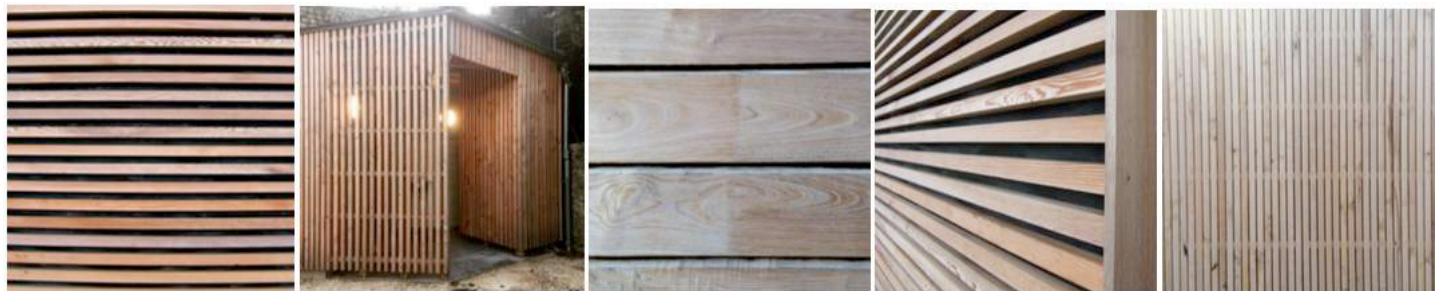

Machined Air-Dried Profiles

Overlapping, interlocking and rainscreen cladding options e.g.

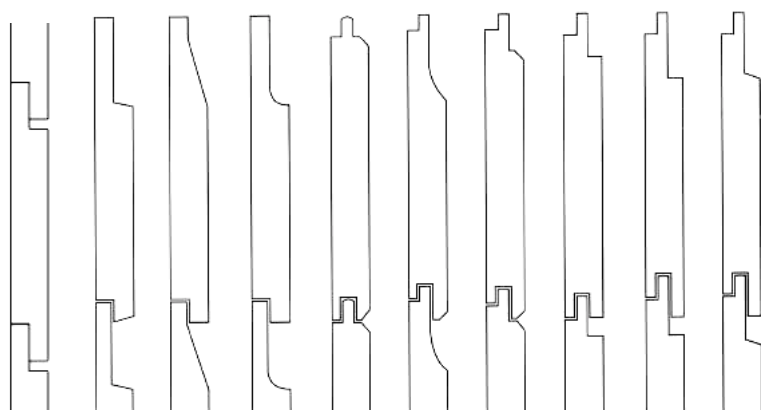

Ex board section size Th x W	Chestnut finger-jointed 4.5m L £/lm	Chestnut solid 2.4m L £/lm	Homegrown Western Red Cedar 3.6m £/lm	Larch 3.0 – 5.0m L £/lm	Oak max 2.5m L £/lm	Oak 2.0 - 4.5m L £/lm
25 x 102	-	-	-	-	-	-
25 x 142	6.95	-	-	-	-	-
25 x 150	-	6.70	6.70	6.70	7.65	13.30
25 x 170	-	7.45	-	-	8.75	14.85
25 x 180	-	-	-	-	8.95	15.65
25 x 200	-	-	-	-	-	17.25

NB. Each profile produces a slightly different face dimension and cover per m2. Typically thicknesses are reduced by 6mm +/- & widths are reduced by 10mm +/- on machining. These prices are based on orders over 20m2. For orders under 20m3 there will be an additional one off charge of £50 +VAT.



Go For Bespoke

To finish at specific thickness or widths you only need let us know and we will produce a bespoke price for you. We are happy to produce custom cladding profiles and specifications. For alternative profiles or dimensions talk to us. Every job is bespoke to us, and it's easier to do than it sounds!

Fixings

We advise the use of austenitic stainless steel fixings for all of our timber cladding products to avoid corrosion and staining issues.

For fresh sawn cladding austenitic stainless steel annular ring shanks (nails) are good for ensuring grip and preventing cupping. The same can be used for air-dried timber only if the fixing holes are pre-drilled to avert the risk of splitting.

There are many ways to fit air-dried cladding that affect the behaviour and aesthetic. The TRADA 'External Timber Cladding' book by Patrick Hislop is an excellent source of information and guidance on installation.

Finishes

To prevent silvering and weathering of external woodwork we stock OSMO UV protection oil.

Stock

Air Dried cladding blanks are kept in stock and production generally has short lead times of 7-10 days depending on volumes and level of machining.

Fresh sawn cladding is available to order with a typical 7 – 21 day lead time depending on species and origin. It is best used soon after sawing to make the most of the initial softness, cleanness, ease and simplicity of use and low cost. These elements are negated when FS cladding timber is kept in stock for more than a couple of weeks and has begun to season. It can harden, bow, twist, split, mildew, stain and cannot be fixed in ways freshly sawn cladding can. It also results in wastage. All things we want to avoid! Book your order for just in time delivery to keep your cladding fresh and at it's best for installation.

Sustainability & Certification

All of our cladding products are sustainably sourced from well managed forests and woodlands. To satisfy procurement procedure we hold chain of custody certification for PEFC, FSC and GIB sources. The % indicates percentage of logs source with traceability.

What Next?

We hope this information is useful We look forward to talking to you about cladding timber soon.

If you have *any* questions don't hesitate to call us 01730 816941 email us sales@englishwoodlandstimber.co.uk or visit our website www.englishwoodlandstimber.co.uk for more information.

